



## FILLING SYSTEM ELEMENTRA<sup>®</sup>

Meet the intuitive generation




# ELEMENTRA® 29

## ELEMENTRA® 29 for high-viscosity products


The servo technology of the ELEMENTRA® 29 (FEIGE e-Power) makes it possible to adapt the entire lifting process during filling to the respective product via control-related parameters.

Thanks to extensive peripherals, the semi-automatic system meets the special requirements of the filling products and the respective environment.

The new touch panel including the FEIGE web HMI offers an intuitive design for high operating comfort.

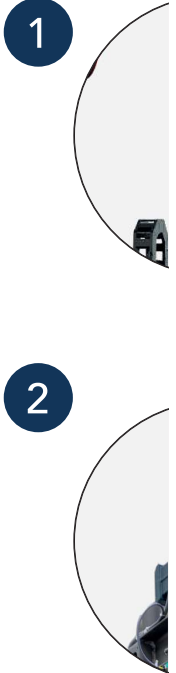

### 1 Electric lifting unit

- Servodrive  POWER
- Automatic positioning when changing container
- Saving expensive energy (compressed air)
- Exhaust-free use also in clean rooms
- With-surface filling possible

### 2 Electric base height adjustment

- Automatic positioning when changing container
- Saving expensive energy (compressed air)
- Exhaust-free use also in clean rooms
- Ergonomic handling for the operator

### 3 Electrically driven drum roller conveyor

- Automatic drum positioning via light barrier
- All rollers with chains and gear motors driven
- Ergonomic further transport of filled drums

### 4 WEB HMI

- Alarm-related help texts with photos, videos and comment function
- Intuitive design for high operating comfort
- Improved usability increases the productivity of the personnel
- 15,6" multi touch screen
- Full HD display
- Comprehensive management of recipes and orders
- FDA-compliant user administration
- Logbook (optional)
- Web-based system

### 5 Fill level and status indication

- Interactive operation by means of LED strip control cabinet door, informing the operator
- Weight-controlled fill level indication

### 6 Large control cabinet

- High flexibility due to standardized machine
- Control up to five drive units

### 7 Stainless steel / acid protection coating

- Design elements at the control cabinet machine with high-quality acid protection coating

### 8 With-surface filling

- The valve tip has a „thread-cutting“ effect, for high-viscosity or sticky filling products
- Continuous upward movement of the filling breaking the product flow
- Upward movement with the product level v



stripes included in the  
rator of every machine status

chine control

coating

made of stainless steel  
g

ect, therefore suitable  
:ts  
lling valve without

rel without immersing or preceding

\* Fig. includes special equipment

## HAVER & BOECKER - INTERPACK 2023

### STAND HALLE 12/A27

#### HAVER & BOECKER



#### PACKING

Phone: +49 (0) 2522 30-0

E-mail: [haver@haverboecker.com](mailto:haver@haverboecker.com)



#### DIGITALIZATION

Phone: +49 (0) 251 208 163 50

E-mail: [info@quat2ro.com](mailto:info@quat2ro.com)

#### BEHN+BATES



#### PACKING

Phone: +49 (0) 251 9796-0

E-mail: [sales@behn Bates.com](mailto:sales@behn Bates.com)



#### PACKING

Phone: +49 (0) 2581 4591-1139

E-mail: [info@aventus.global](mailto:info@aventus.global)

#### NEWTEC BAG PALLETIZING



#### PALLETIZING+LOADING

Phone: +33 389 633750

E-mail: [info@newtec bag.com](mailto:info@newtec bag.com)

#### Feige FILLING GmbH

Rögen 6a

D-23843 Bad Oldesloe

Germany

Phone: +49 4531 8909 0

E-mail: [info@feige.com](mailto:info@feige.com)

Internet: [www.feige.com](http://www.feige.com)

